

• TULEX IMPACT TORX BIT SOCKET (INTEGRAL) :

Tulex Torx Bit Sockets are used for tightening of Torx screws & bolts with pneumatic / hydraulic impact wrenches. These are available in 3/8" (9.5 mm) & 1/2" (12.7 mm) square drives covering Torx point sizes ranging from T10 to T40. These impact Torx Bit sockets has a provision for locking pin and 'O' ring onto the impact wrench. These are widely used in automobile assembly lines.

3/8" SQUARE DRIVE :

PART NO.	POINT SIZE	OVERALL LENGTH (IN MM)
TUTXM-10BI	T10	44
TUTXM-15BI	T15	44
TUTXM-20BI	T20	44
TUTXM-25BI	T25	44
TUTXM-27BI	T27	44
TUTXM-30BI	T30	44
TUTXM-40BI	T40	44

1/2" SQUARE DRIVE :

PART NO.	POINT SIZE	OVERALL LENGTH (MM)
TUTXM-10CI	T10	50
TUTXM-15CI	T15	50
TUTXM-20CI	T20	50
TUTXM-25CI	T25	50
TUTXM-27CI	T27	55
TUTXM-30CI	T30	55
TUTXM-40CI	T40	55



We can also manufacture specific sizes not mentioned in our above tables, as per clients requests.


• TULEX ALLEN HEAD POWER BIT :

Tulex Allen Head Power Bits is used for operation with a pneumatic screw driver. The Power Bit has a male Hex Drive on one end which fits into the female hex shank of the screw driver and on the other end is a male Allen Head Bit. These are used for tightening of Allen Head Cap Screws and Bolts. These are widely used in automobile assembly lines. The range covers 1/4" (6.35 mm) hex drives for Allen Head hex sizes from 3 mm to 10 mm. Other sizes including SAE (inch) sizes can be supplied against specific requests.

Note: 5/16" Hex Drive also available on request.

1/4" Hex Male Drive x Allen Bit

OVERALL LENGTH	50 MM	75 MM	100 MM
ACROSS FLAT HEX SIZE (IN MM)	PART NO.	PART NO.	PART NO.
3	TUHB-3Z	TUHB-3W	TUHB-3X
4	TUHB-4Z	TUHB-4W	TUHB-4X
5	TUHB-5Z	TUHB-5W	TUHB-5X
6	TUHB-6Z	TUHB-6W	TUHB-6X
8	TUHB-8Z	TUHB-8W	TUHB-8X
10	TUHB-10Z	TUHB-10W	TUHB-10X

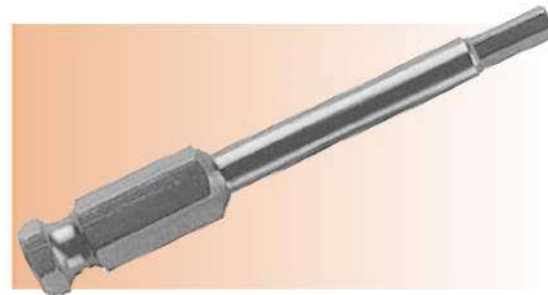

We can also manufacture any special size not covered in above range as per clients requests.


• TULEX TORX HEAD POWER BIT :

Tulex Torx Head Power Bits is used for operation with a pneumatic screw driver. The Power Bit has a male Hex Drive on one end which fits into the female hex shank of the screw driver and on the other end is a male Torx Bit. These are used for tightening of Torx Head Screws and Bolts. These are widely used in automobile assembly lines. The range covers 1/4" (6.35 mm) hex drives for Torx Point Size T10 to T40.

Note: 5/16" Hex Drive also available on request.

1/4" Hex Male Drive x Torx Bit

OVERALL LENGTH	50 MM	75 MM	100 MM	150 MM
POINT SIZE	PART NO.	PART NO.	PART NO.	PART NO.
T10	TUTX-10Z	TUTX-10W	TUTX-10X	TUTX-10Y
T15	TUTX-15Z	TUTX-15W	TUTX-15X	TUTX-15Y
T20	TUTX-20Z	TUTX-20W	TUTX-20X	TUTX-20Y
T25	TUTX-25Z	TUTX-25W	TUTX-25X	TUTX-25Y
T27	TUTX-27Z	TUTX-27W	TUTX-27X	TUTX-27Y
T30	TUTX-30Z	TUTX-30W	TUTX-30X	TUTX-30Y
T40	TUTX-40Z	TUTX-40W	TUTX-40X	TUTX-40Y

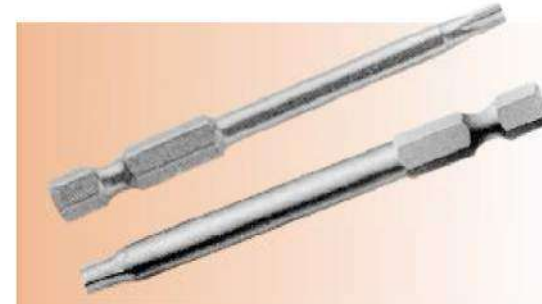

We can also manufacture any special size not covered in above range as per clients requests.